

138/60

÷ 11

PATENT SPECIFICATION

809,307



Date of Application and filing Complete Specification Dec. 4, 1956.

No. 37051/56.

Application made in United States of America on Dec. 15, 1955.

Complete Specification Published Feb. 18, 1959.

Index at acceptance: —Classes 87(2), A1R(14C1B:29X); 99(1), G1A; and 99(2), P1(A8:B7).

International Classification: —B29f. F06l.

COMPLETE SPECIFICATION

Preformed Flexible Hose and method of making it

We, RESISTOFLEX CORPORATION, of Woodland Road, Roseland, County of Essex, State of New Jersey, United States of America, a Corporation organized under the laws of the State of New York, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to flexible hose lines, and concerns a hose line having a polytetrafluoroethylene (herein referred to as "Teflon", the Registered Trade Mark of the Dupont Company by which it is generally known) tube and which may be bent into tighter bends than have heretofore been possible.

There are numerous applications in which flexible hose lines are used by preference in order to avoid vibration failure and difficult installation problems which are encountered in the use of rigid metal tubing. The types of installation under discussion are found in numerous kinds of apparatus but in particular in the "plumbing" of jet engines and other types of aircraft power plants. There is a great quantity of tubing, for example, on a jet engine for conveying fuel and oil and the space requirements are such that in many places very tight bends of the tubing or hose must be made, that is bends with a relatively short radius, including various complex bends.

The use of flexible hose lines on jet engines and for other applications wherein they are subjected to high temperature conditions heretofore requiring the use of metal tubing has recently become feasible, it should be noted, by the development of hose having a tube of "Teflon", which material is capable of use under operating temperatures up to about 500° F.

Flexible hose lines, however, have been limited to certain specific minimum bend radii as bends beyond the minimum for any particular hose size result in its collapse. "Teflon" tubing is not as flexible as rubber

and its relative rigidity gives it a large minimum bend radius. Because of this situation designers have heretofore continued to use bent rigid metal tubing, well knowing that it may have a short life due to vibration failure and that installation of the bent metal tubing sections may present serious production problems due to the necessity of much custom fitting of each rigid assembly and an attendant stressing to an unknown degree of hard-to-fit or inaccurately fitted parts.

The present invention meets these problems, enabling flexible hose lines of the type described to be used in locations where a rigid bent metal pipe has heretofore been considered necessary, by the use of what is termed herein "preformed" flexible hose. By the preforming process of the invention it is possible to bend the hose on a much smaller bend radius. The hose so bent may be permanently set to the shape it will have in the installation for which it is intended. Hence it is more easily installed.

The hose which is preformed in accordance with the invention is one which has a tube of polytetrafluoroethylene. This tube may have an outer reinforcing covering of any desired flexible construction, which covering usually consists of one or more tubular layers of wire braided closely around the Teflon tube. Such hose is, of course, made into hose assemblies by the attachment of fittings to the ends of sections of hose of the desired length.

Preforming of such hose in accordance with the invention is carried out in the following general manner: A section of hose of approximately the desired length, is filled with a suitable flexible mandrel or pressure medium such as gas or liquid, bent while cold, heated while held in the desired bent shape, cooled and then, if a mandrel has been used, stripped off of the mandrel. As will be apparent, the process is equally applicable to the shaping of naked "Teflon" tubing wherever the use of such tubing with sharp bends is desirable.

The invention will be better understood from the following detailed description read in

[Price 3s. 6d.]

conjunction with the drawings in which:—

Fig. 1 illustrates diagrammatically in solid lines, for a particular size of "Teflon" hose having a cover consisting of a single layer of wire braid, the minimum preformed bend radius and in broken lines the normal minimum bend radius of the same hose;

Fig. 2 is a fragmentary central longitudinal section through a piece of similar hose of somewhat larger size with a flexible mandrel inserted therein; and

In Fig. 1 the original drawings show to scale in broken lines the normal minimum bend radius of a hose 5 of "—4" size in accordance with the table hereinafter set forth. This size hose, if bent to a shorter radius, will kink the tube and restrict the flow through it. In solid lines Fig. 1 shows the minimum bend radius which may be obtained with the same hose by preforming in accordance with the invention.

The first step in the process is to cut the hose to the approximate length desired, allowing a slight excess. Into this hose any suitable flexible mandrel is inserted. The only requirements for the mandrel are that it shall be sufficiently flexible, shall have a sufficient body to prevent the collapse of the tube when bent, and shall be able to withstand the temperature of the subsequent heat treatment. Suitable materials which have been used as mandrels include solid rod or tubing of Teflon, silicone rubber and synthetic rubber such as neoprene. Hose of such materials and flexible steel shafting may likewise be used.

In Figs. 1 and 2 the hose 5 is shown as having a Teflon tube 6 and a single wire braid cover 7 (schematically represented), inside which is a flexible solid mandrel 8. The mandrel should be of such size relative to the hose as to have an easy slip fit therein, as large as can be used without making removal difficult after bending.

The next step is to bend the tubing or hose containing the mandrel into the desired shape, holding that shape by means of any suitable fixture or jig. One form of fixture is shown in Fig. 3 and consists of a flat plate 10 to which is attached by a bolt 11 a cylindrical block 12 around which are a number of adjustable clamps or stops 13 held by screws 14. If

the block 12 and the faces of clamps 13 extend upwardly from plate 10 for a sufficient distance, a number of sections of bent tubing or hose may be simultaneously held in the fixture. The bend shown is 180° but by eliminating one or more of the clamps, any lesser bend may be formed and by the use of other clamps or stops one may form compound bends.

After the tubing or hose is mounted as above described it, together with the fixture, is heated in an oven to the desired temperature and allowed to remain therein until the tubing or hose has become uniformly heated throughout. The temperature is preferably of the order of about 450° F. "Teflon" becomes a gel above 620° F. and it should be heated short of this temperature. It may be formed at temperatures much lower than 400° F. but the heat treatment then requires a longer time. Optimum results are obtained by heating for about 1/2 hour at 450° F.

The next step is to cool the tubing or hose down to room temperature while still retained in the desired shape, after which it is removed from the fixture, the mandrel withdrawn, its ends trimmed, and fittings applied thereto if desired. There is thus produced a preformed tube or hose assembly having the exact shape desired in use but still having flexibility.

One factor determining the temperature to be used in the heat treatment is that "Teflon" tubing which has been formed to a particular shape in the manner described will not retain that shape if it is heated to a temperature above that at which it was formed. Due to its "plastic memory", it tends to return to its initial shape if raised to a high temperature. If it is known that a hose assembly is to be used, for example, under conditions where it will be heated to a temperature of 400° F., it should be preformed at a somewhat higher temperature, for example 450° F.

The following table shows the great difference between the normal minimum bend radius of hose of the type above described, having a Teflon tube and a single layer cover of stainless steel wire braid, and the sharper bends which may be made in the same hose in accordance with the invention:—

Tube size (dash No.)	Flexible hose		Normal min. bend radius* inches	Min. preform radius* inches
	I.D. (inches)	O.D. (inches)		
—4	$\frac{3}{16}$	$\frac{5}{16}$	2	$\frac{3}{4}$
—5	$\frac{1}{4}$	$\frac{3}{8}$	3	1
—6	$\frac{5}{16}$	$\frac{7}{16}$	4	$1\frac{1}{4}$
—8	$\frac{13}{32}$	$\frac{9}{16}$	$4\frac{5}{8}$	$1\frac{1}{2}$
—10	$\frac{1}{2}$	$\frac{21}{32}$	$5\frac{1}{2}$	$1\frac{3}{4}$
—12	$\frac{5}{8}$	$\frac{25}{32}$	$6\frac{1}{2}$	2
—16	$\frac{7}{8}$	$1\frac{1}{32}$	$7\frac{3}{8}$	3
—20	$1\frac{1}{8}$	$1\frac{11}{32}$	9	5

*All bend radii are measured to the surface of bent hose on the inside of the bend, not to its center line.

There is no degradation whatever or any change in the characteristics of "Teflon" in preforming it as above described and it may, if desired, be reshaped any number of times.

5 One advantage of the process is that in making experimental assemblies or "mock-ups" a completed hose assembly having bends sharper than the normal minimum bend radius of the hose may be formed by filling it with a mandrel, attaching it by means of its end fittings in the place where it is to be used, restraining it in its bent position by any suitable means, and then removing while still under such restraint and subjecting it to heating and cooling as above described. Upon the removal of the mandrel, one has a complete preformed assembly and many hours of drafting time have been saved which otherwise would have been required. The preformed assembly thus produced may thereafter be used as a model from which duplicate assemblies may be produced merely by building a forming fixture around it.

10 While the use of a mandrel as above described has been found preferable for most bending and forming operations, in the case of very complex bends where removal of a mandrel might present a problem one may prevent kinking or collapse of the tube or hose during forming by equipping it with end fittings, either temporary or permanent, and filling it with a pressure fluid. Compressed air and other gases have been used, a pressure relief valve being connected to the tube to release pressure during the heating step to prevent the development of excessive pressure which would otherwise result from the expansion of the gas. Similarly, a suitable incompressible liquid may be used, preferably one having a boiling point above the temperature used in the heating step. There are several suitable high-boiling point oils.

The foregoing detailed description is merely by way of illustrating the invention and many details may be changed without departing from the invention as defined in the claims.

45 WHAT WE CLAIM IS:—

1. The method of forming from a length of flexible hose having a polytetrafluoroethylene tube, which hose normally has a given minimum radius about which it can be bent, a bent section having a bend radius substantially less than said given minimum, comprising the steps of filling the hose with a substance capable of exerting pressure against the tube wall during bending sufficient to prevent its collapse, forming the hose while cold to the shape desired for the bent section, heating the hose while maintaining said shape to a temperature substantially below the gel point of the polytetrafluoroethylene for a time sufficient to cause said shape to be retained upon cooling, cooling the hose while still maintaining it in said shape, and thereafter removing said substance.

2. The method according to Claim 1, characterized in that said substance comprises a solid rod or tubing of polytetrafluoroethylene.

3. The method according to Claim 1, characterized in that said substance comprises a solid rod or tubing of silicone rubber.

4. The method according to Claim 1, characterized in that said substance comprises a solid rod or tubing of neoprene rubber.

5. The method according to Claim 1, characterized in that said substance comprises a high-boiling point oil.

6. The method according to Claim 1, characterized in that said substance comprises compressed air.

7. A flexible hose having a polytetrafluoroethylene tube encased in a wire braid reinforcing covering characterized by a bent section formed in accordance with the method of any of the preceding claims.

8. The method according to Claim 1, substantially as described herein with reference to the appended drawing.

9. A flexible hose having a polytetrafluoroethylene tube formed with a bent section substantially as shown and described.

MEWBURN, ELLIS & CO.,
70/72, Chancery Lane, London, W.C.2,
Chartered Patent Agents.



809,307

COMPLETE SPECIFICATION

1 SHEET

This drawing is a reproduction of the Original on a reduced scale.

TEFLON
OR
NEOPRENE

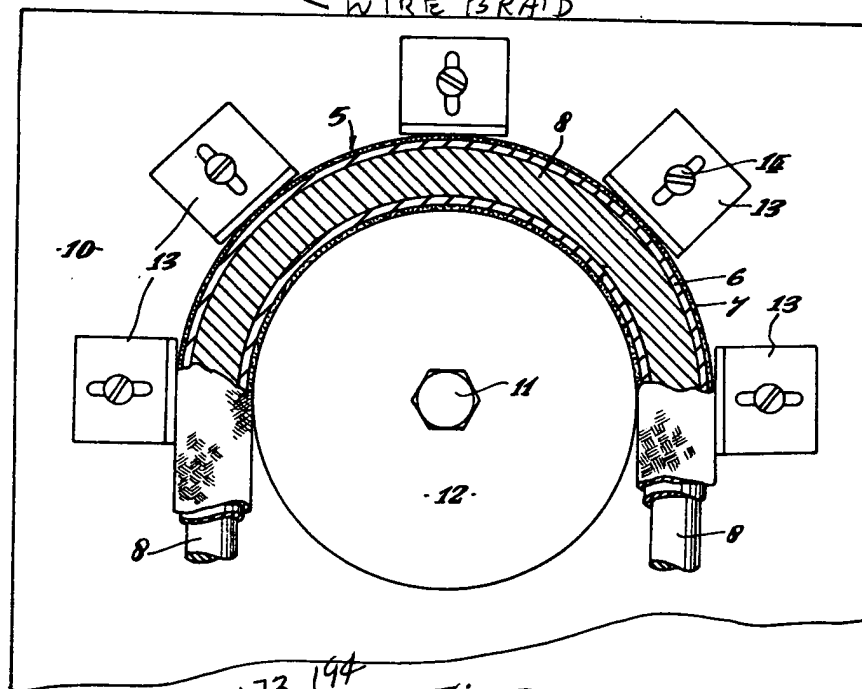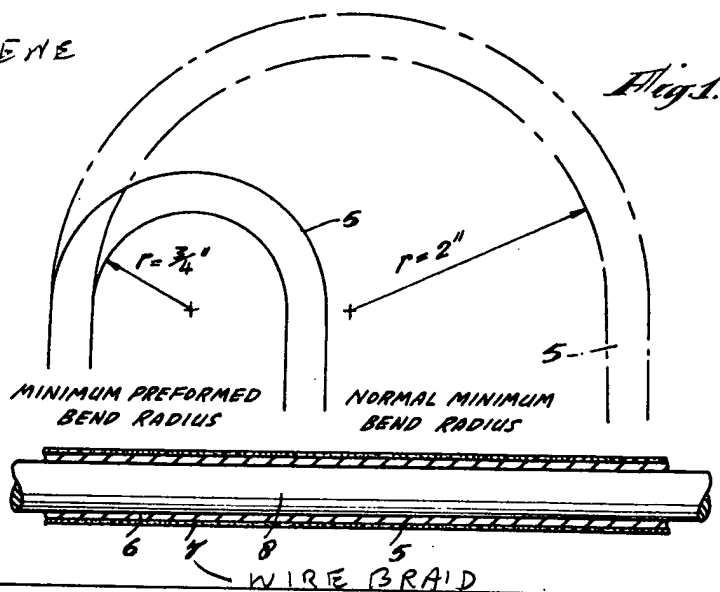

French Duplicate 1,173,194 *Fig. 2.*